

TECHNICAL DATA

HAND-GUIDED DOUBLE DRUM VIBRATORY ROLLER
BW 65 H, BW 75 H



Higher compaction power and surface quality
BOMAG double vibration



Precise and save to operate
All function integrated in the steering rod head




Simple and reliable to start
Electric starter and hand starter

Shipping dimensions in m3

BW 65 H 1,609

BW 75 H 2,769

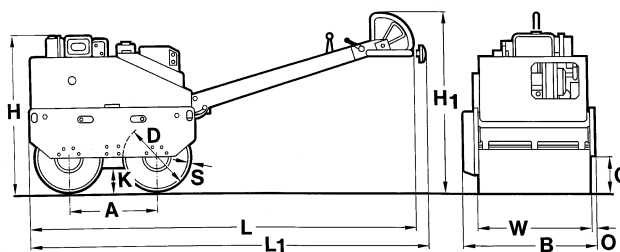

Standard Equipment

- ☒ Hydrostatic drive
- ☒ Double vibration
- ☒ Mechanical vibration drive
- ☒ Electric starter
- ☒ Infinitely variable speed control
- ☒ Sprinkler system
- ☒ Vibration dampened steering rod
- ☒ Height adjustable steering rod
- ☒ Vibration and throttle regulation on the steering rod
- ☒ 2 scrapers per drum
- ☒ Automatic shutdown at low oil level (BW65H)
- ☒ Single point lifting device
- ☒ Safety crank handle (BW65H)
- ☒ * Safety control
- ☒ * Back-up drive protection
- ☒ * Parking brake
- ☒ 3-2-1 Warranty

Optional Equipment

- ☐ Parking brake
- ☐ Tool kit
- ☐ Special painting
- ☐ Service Kit
- ☐ US Version EPA 4 NRTC (BW65H)
- ☐ TOUGH WARRANTY

* Standard delivery with CE conformity (valid within European Union) (+5kg)

Dimensions in mm

	A	B	C	D	H	H1	K	L	L1	O	S	W
BW 65 H	550	762	200	400	960	1210	110	2200	2320	20	8	650
BW 75 H	620	865	250	500	1100	1159	128	2910	3010	20	10	750

Technical Data

Weights

	kg	BOMAG BW 65 H	BOMAG BW 75 H
Operating weight CECE	757		1,040
Basic weight	727		1,010
Average axle load CECE	379		520
Average static linear load CECE	5,8		6,9

Dimensions

Overall length, min.	mm	1.230	1.360
---------------------------	----	-------	-------

Driving Characteristics

Speed (1), forward	km/h	0- 5,5	0- 5,0
Speed (1), reverse	km/h	0- 2,5	0- 2,5
Max. gradeability without/with vibr.	%	40/35	40/35

Drive

Engine manufacturer		Hatz	Yanmar
Type		1D 42	L100
Emission stage		non EPA	non EPA
Cooling		air	air
Number of cylinders		1	1
Performance ISO 3046	kW	6,2	6,2
Speed	min-1	2.800	3.100
Fuel		diesel	diesel
Drive system		hydrost.	hydrost.
Driven drum		front + rear	front + rear
Fuel consump. aver. during operation	l/h	1,3	1,5

Brakes

Service brake	hydrost.	hydrost.
Parking brake	mech.	mech.

Exciter system

Vibrating drum		front + rear	front + rear
Drive system		mech.	mech.
Frequency	Hz	55	55
Amplitude	mm	0,45	0,50
Centrifugal force	kN	22	40

Sprinkler System

Type of sprinkling	gravity	gravity
--------------------------	---------	---------

Capacities

Fuel	l	5,0	5,5
Water	l	60,0	60,0

Technical modifications reserved. Machines may be shown with options.

BOMAG
Hellerwald
D-56154 Boppard
P.O. Box 5162
Tel. (0)6742 - 1000
Fax (0)6742 - 3090

