

MANIACCESS

150 AETJ C 150 AETJ C 3D



**Self-propelled electric
articulating boom lift**

- Working height : 15.00 m
- Max. outreach : 7.60 m
- Up and over : 7.00 m
- Overall width : 1.50 m
- 3D option : Jib rotation

COMPACT



MANITOU

150 AETJ C Compact 150 AETJ C 3D Compact



Working height	15.00 m
Platform height	13.00 m
Horizontal outreach	7.60 m
Up and over clearance	7.00 m
Jib movement	+70° / -70°
Jib rotation (option 3D)	+70° / -70°
Basket rotation	140°
Turret rotation	355°



Platform capacity	200 kg/2 peoples
External use	45 km/h (Maximum allowed wind speed)
Basket size	1.20 x 0.96 m



Width	1.50 m
Length	6.05 m
Stowed length (storage)	4.40 m
Height	1.97 m
Stowed height (storage)	2.08 m



Turning radius inside	1.87 m
Turning radius outside	3.96 m
Turning radius outside (basket)	4.82 m
Ground clearance	0.14 m
Wheel base	2.00 m
Drive speed	5.0 km/h
Working speed	0.6 km/h



Gradeability	25%
Maximum slope accepted	5% ou 3°



Weight	6 700 kg
---------------------	----------



Tires	0.60 x 0.19 m
Wheel steer	2 (front)
Wheel drive	2 (back)



Batteries	300 Ah / 2x24 V
Battery charger	45 Ah/48 V




Standard equipment

- Protected control basket panel
- Electrical battery traction
- Negative brakes
- Lifting brackets
- Hour meter
- Warning buzzer in the basket
- 220 V predisposal
- Voltage indicator
- Safety manual pump
- Basket with mesh floor
- Bus CAN technology
- Diagnostic help integrated
- Dual electrical motors
- Rubber and no marking tires
- Integrated charger


Options

- Jib rotation (3D)

- High capacity battery (360 Ah)
- Dual voltage charger 110 V / 230 V
- Working lights
- Electric plug in the platform with circuit breaker (230 V)
- Flashing light
- Drive alarm
- All motion alarm
- Cold conditions -25°C
- Air predisposal
- Water predisposal
- Specific painting
- Biodegradable oil

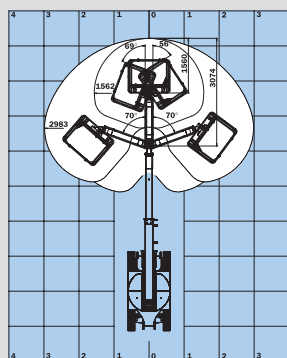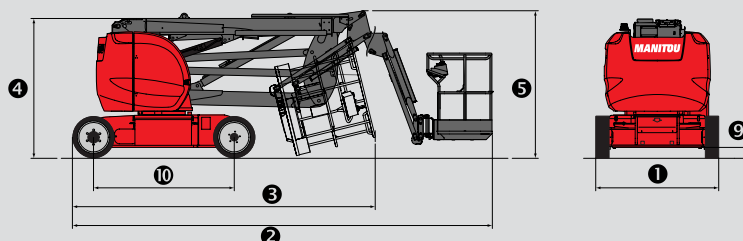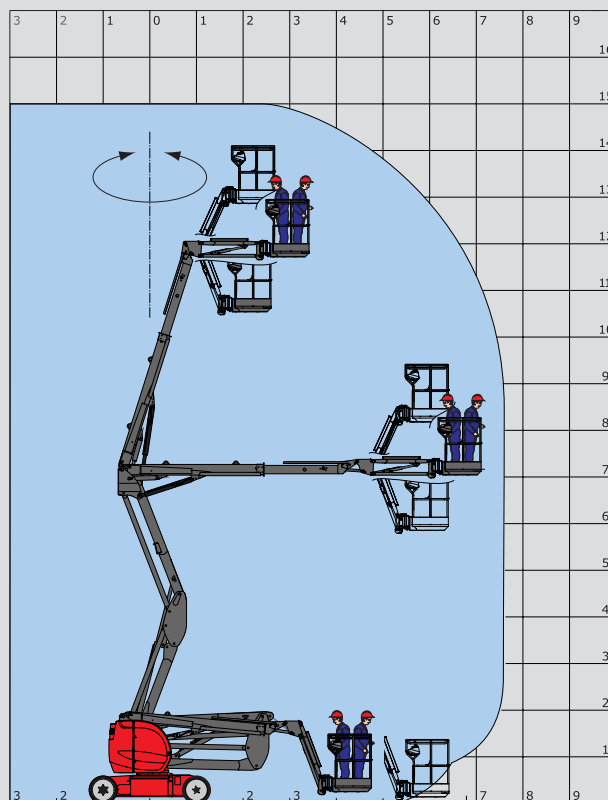

Option 3D : jib rotation

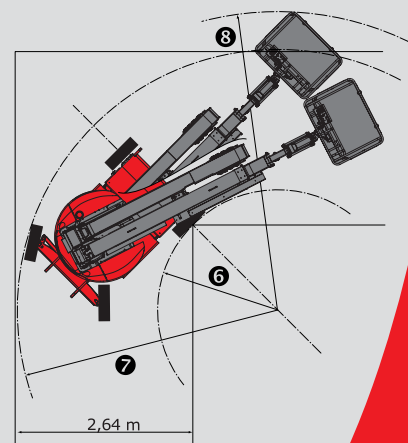

The equipment supplied with each model may differ from that described in this leaflet.
For more details, contact your MANITOU dealer.



MANITOU BF SA

B.P. 249 - 44158 Ancenis Cedex - France
Tél. : 33 2 40 09 10 11 / Export Department Fax : 33 2 40 09 10 97
www.manitou.com

700344EN

