

MANIACCESS ■ 170 AETJ L



Self-propelled electric articulating boom lift

- Working height : 16.90 m
- Max. outreach : 9.40 m
- Up and over : 7.00 m
- Overall width : 1.75 m



170 AETJ L

	Working height	16.90 m
	Platform height	14.90 m
	Horizontal outreach	9.40 m
	Up and over clearance	7.00 m
	Jib movement	+70° / -70°
	Basket rotation	140°
	Turret rotation	355°

	Platform capacity	200 kg/2 peoples
	External use	45 km/h (Maximum allowed wind speed)
	Basket size	1.20 x 0.96 m

	① Width	1.75 m
	② Length	6.84 m
	③ Stowed length (storage)	5.12 m
	④ Height	1.97 m
	⑤ Stowed height (storage)	2.04 m

	⑥ Turning radius inside	1.97 m
	⑦ Turning radius outside	4.30 m
	⑧ Turning radius outside (basket)	5.60 m
	⑨ Ground clearance	0.14 m
	⑩ Wheel base	2.00 m
	Drive speed	5.0 km/h
	Working speed	0.6 km/h

	Gradeability	22%
	Maximum slope accepted	5% or 3°

	Weight	6 910 kg
--	---------------------	----------

	Tires	0.60 x 0.19 m
	Wheel steer	2 (front)
	Wheel drive	2 (back)




	Batteries	300 Ah / 2x24 V
	Battery charger	45 Ah/48 V

Standard equipment

- Protected control basket panel
- Electrical battery traction
- Negative brakes
- Lifting brackets
- Hour meter
- Warning buzzer in the basket
- 220 V predisposal
- Voltage indicator
- Safety manual pump
- Basket with mesh floor
- Bus CAN technology
- Diagnostic help integrated
- Dual electrical motors
- Rubber tires
- Integrated charger

Options

- No marking tires
- High capacity battery (360 Ah)
- Dual voltage charger 110 V / 230 V
- Working lights
- Electric plug in the platform with circuit breaker (230 V)
- Flashing light
- Drive alarm
- All motion alarm
- Cold conditions -25°C
- Air predisposal
- Water predisposal
- Specific painting
- Biodegradable oil

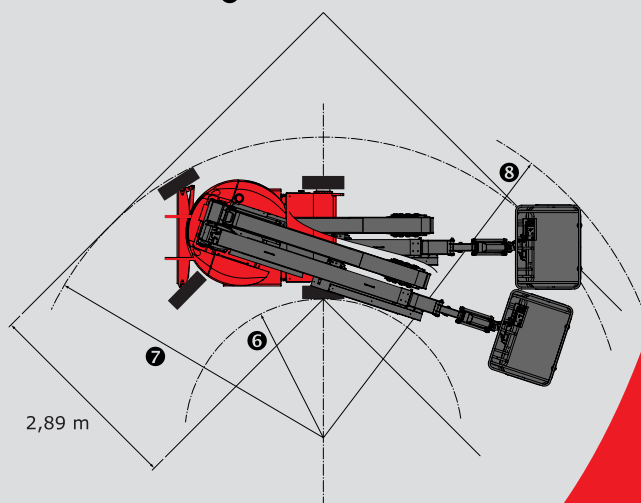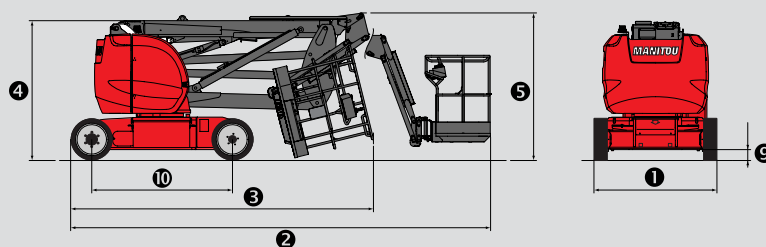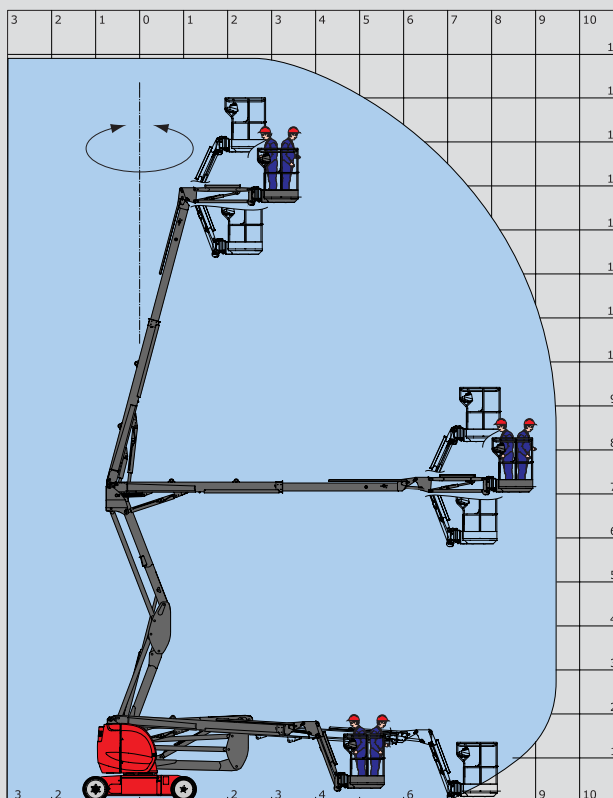

The equipment supplied with each model may differ from that described in this leaflet.
For more details, contact your MANITOU dealer.



MANITOU BF SA

B.P. 249 - 44158 Ancenis Cedex - France
Tél. : 33 2 40 09 10 11 / Export Department Fax : 33 2 40 09 10 97
www.manitou.com

700346EN

